

GRIFLEX

hose & ducting solutions

NEW

Also Available

- CDFG - Non-Toxic Delivery Hose
- ASH - Agricultural Spray Hose
- ASDH - Agricultural Seed Drill Hose
- CUL - Standard Medium Duty Suction and Delivery Hose



MTH

Milk Tanker Hose

Designed specifically for the dairy industry, it is tough, flexible and extremely durable. Suitable for conveyance of dairy products and food stuffs in liquid and solid form. Approved for use with dairy products. Outstanding resistance to the effects of weather with minimum frictional loss is achieved by the smooth bore. Excellent chemical resistance.

Applications

Suitable for conveyance of dairy products and food stuffs in liquid and solid form. Approved for use with dairy products.

Construction

Rigid crush resistant anti-shock PVC spiral helix encapsulated in a yellow or blue flexible PVC cover, with a smooth inside wall.

Colour

Standard - Yellow or Blue

Temperature Range

-10°C to +55°C

Size Range

2" and 2 1/2"


Other sizes available on request

Standard Length

30m and 50m coils

Special Features

- Tough, flexible and extremely durable
- Outstanding resistance to the effects of weather
- Minimum frictional loss is achieved by the smooth bore
- Excellent chemical resistance

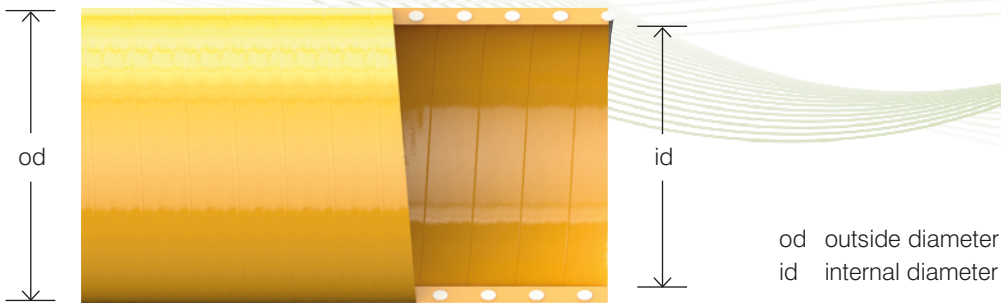

MTH - Milk Tanker Hose

Product Ref.	Internal Dia. Inches	Internal Dia. mm	External Dia. mm	Wall Thickness Overall mm	Weight kg/m	Min. Bend Radius mm	Vacuum m of H ₂ O	Working Pressure Bar	Coil Length Metres
MTH20	2"	51.0	63.2	6.1	1.36	230	9	5.5	30 / 50
MTH25	2 1/2"	63.0	76.8	6.9	1.91	330	9	4.5	30 / 50

All sizes are nominal and normal manufacturing tolerances apply.

Special Sizes are available on request but may be subject to Minimum Order Quantities and Leadtimes.

- (i) Maximum working pressure is based on a factor of safety of 3:1 on short term burst pressure at 20°C. If the temperature increases, please refer to the temperature pressure charts.
- (ii) Lengths detailed above are as standard, however variations may be available subject to minimum order quantities. Weights are approximate dependent upon working tolerance and density of materials.
- (iii) Bending diameter information is intended as a guide to the minimum bend radius at 20°C ambient temperature without restricting the bore. It does not mean that the hose cannot be bent below the given dimensions but restriction is likely to occur.

